

The data to be read in conjunction with the Hydrogen Thyatron Preamble.

### ABRIDGED DATA

Deuterium-filled two-gap thyratrons with metal/ceramic envelopes, suitable for switching high peak and average power at high pulse repetition rates. A reservoir operating from the cathode heater supply or a separate supply is incorporated.

The CX1836/CX1836X has three control grids which can be configured to enable the tube to operate both as a standard modulator switch with or without trigger grid negative bias and also as a command charge switch where a high level of immunity to spurious triggering is required.

The CX1836X, which must be used in conjunction with e2v technologies resistor box MA942A, permits a larger variation in internal deuterium pressure than the CX1836. Resistor box settings and/or reservoir heater voltage can be adjusted within the specified limits to obtain the maximum thyatron gas pressure consistent with the required voltage hold-off.

Peak forward anode voltage . . . . .	70	kV max
Peak forward anode current . . . . .	10	kA max
Average anode current . . . . .	10	A max
Operating frequency (see note 1) . . . . .	10	kHz max
	50	Hz min

### GENERAL

#### Electrical

Cathode . . . . .	barium aluminate impregnated tungsten
Cathode heater voltage (see note 2) . . . . .	$6.3 \pm 5\%$ V
Cathode heater current . . . . .	90 A
Reservoir heater voltage (see notes 2 and 3) . . . . .	$6.3 \pm 5\%$ V
Reservoir heater current . . . . .	7.0 A
Tube heating time (minimum) . . . . .	10 min
Anode to gradient grid capacitance . . . . .	45 pF
Gradient grid to screen grid capacitance . . . . .	45 pF

#### Mechanical

Seated height . . . . .	336 mm (13.228 inches) max
Clearance required below mounting flange . . . . .	75 mm (2.953 inches) min
Overall diameter (excluding connections) . . . . .	155.4 mm (6.118 inches) max
Net weight . . . . .	11.4 kg (25.1 pounds) approx
Mounting position . . . . .	see note 4
Tube connections . . . . .	see outline

#### Cooling

The tube must be cooled by total liquid immersion, for example in force circulated transformer oil (see e2v technologies Technical Reprint No. 108 'The cooling of oil-filled electrical equipment, with special reference to high power line-type pulse generators' by G. Scoles). Care must be taken to ensure that air is not trapped inside the tube end cover.

In pulse modulator service, the tube dissipates 600 W of heater power and from 100 W per ampere average anode current, rising to 300 W/A at the highest rates of rise and fall of anode current.



### PULSE MODULATOR SERVICE MAXIMUM AND MINIMUM RATINGS

These ratings cannot necessarily be used simultaneously and no individual rating must be exceeded.

	Min	Max
<b>Anode</b>		
Peak forward anode voltage (see note 5) . . . . .	-	70 kV
Peak inverse anode voltage (see note 6) . . . . .	-	70 kV
Peak anode current . . . . .	-	10 kA
Average anode current . . . . .	-	10 A
Rate of rise of anode current (see notes 7 and 8) . . . . .	-	10 kA/ $\mu$ s



Care should be taken to ensure that excessive voltages are not applied to the reservoir heater circuit from the cathode heater supply because of high impedance cathode heater connections. For example, in the worst case, an open circuit heater lead will impress almost double voltage on the reservoir heater, especially on switch-on, when the cathode heater impedance is minimal. This situation can be avoided by ensuring that the two supplies are in anti-phase. The reservoir heater circuit must be decoupled with suitable capacitors, for example, a 1  $\mu$ F capacitor in parallel with a low inductance 1000 pF capacitor (see schematic drawing on page 6).

The heater supply systems should be connected directly between the cathode flange and the heater leads. This avoids the possibility of injecting voltages into the cathode and reservoir heaters. At high rates of rise of anode current, the cathode potential may rise significantly at the beginning of the pulse, depending on the cathode lead inductance, which must be minimised at all times.

If a single transformer is used to supply both the cathode heater and the reservoir heater, then the reservoir heater lead (red sleeve) must be connected to the mounting flange.

3. CX1536AX gas pressure may be altered using E2V Technologies resistor box type MA942A. The CX1536AX **must** be used in conjunction with the MA942A. The resistor box must be connected between the gas pressure control lead (black sleeve) and the cathode heater leads (yellow sleeves). Gas pressure may be increased by increasing the resistor box settings from their initial recommended values which accompany each delivered CX1536AX. The gas pressure may be increased to a value consistent with the required forward hold-off voltage. Additional variations in gas pressure can be achieved by altering the reservoir heater supply voltage within the specified range.
4. The tube must be fitted using its mounting flange, with flexible connections to all other electrodes. The preferred orientation is with the tube axis vertical and anode uppermost; mounting the tube with its axis horizontal is permissible. It is **not** recommended that the tube is mounted with its axis vertical and cathode uppermost.
5. The maximum permissible peak forward voltage for instantaneous starting is 50 kV and there must be no overshoot.
6. The peak inverse voltage including spike must not exceed 10 kV for the first 25  $\mu$ s after the anode pulse. Amplitude and rate of rise of inverse voltage contribute greatly to tube dissipation and electrode damage; if these are not minimised in the circuit, tube life will be shortened considerably. The aim should be for an inverse voltage of 3 – 5 kV peak with a rise time of 0.5  $\mu$ s.
7. This rate of rise refers to that part of the leading edge of the pulse between 25% and 75% of the pulse amplitude.
8. For single-shot or burst mode applications this parameter can exceed 100 kA/ $\mu$ s. The ultimate value which can be attained depends to a large extent upon the external circuit.
9. Measured with respect to cathode.

10. A lower rate of rise may be used, but this may result in the anode delay time, delay time drift and jitter exceeding the limits quoted.
11. If grid 1 is pulsed, the last 0.25  $\mu$ s of the top of the grid 1 pulse must overlap the corresponding first 0.25  $\mu$ s of the top of the delayed trigger pulse.
12. Negative bias may be needed depending on the configuration of the grid 1, grid 2 and grid 3. See Trigger Grid Connections below.
13. In a screen grid configuration the CX1836/CX1836X must be triggered with a current pulse which is considerably higher than that required in a normal configuration.
14. The optimum grid 1 pulse current is the maximum value which can be applied without causing the tube to trigger before the grid 2 pulse is applied. This value is variable depending on gas pressure, maximum forward anode voltage, grid 2 negative bias voltage, peak current and repetition rate.
15. DC negative bias must not be applied to grid 1.
16. Measured between the second minute after the application of HT and 30 minutes later.
17. A time jitter of less than 1 ns can be obtained if the cathode heater voltage is supplied from a DC source, by adopting double pulsing and applying a grid 2 pulse with a rate of rise of voltage (unloaded) in excess of 20 kV/ $\mu$ s.
18. Measured after a current pulse of 1000 A, with a grid 2 bias voltage of –100 V, a recovery impedance of 500  $\Omega$  and a 1.0 kV anode probe.

## HEALTH AND SAFETY HAZARDS

e2v technologies hydrogen thyratrons are safe to handle and operate, provided that the relevant precautions stated herein are observed. e2v technologies does not accept responsibility for damage or injury resulting from the use of electronic devices it produces. Equipment manufacturers and users must ensure that adequate precautions are taken. Appropriate warning labels and notices must be provided on equipments incorporating e2v technologies devices and in operating manuals.



### High Voltage

Equipment must be designed so that personnel cannot come into contact with high voltage circuits. All high voltage circuits and terminals must be enclosed and fail-safe interlock switches must be fitted to disconnect the primary power supply and discharge all high voltage capacitors and other stored charges before allowing access. Interlock switches must not be bypassed to allow operation with access doors open.



### X-Ray Radiation


All high voltage devices produce X-rays during operation and may require shielding. The X-ray radiation from hydrogen thyratrons is usually reduced to a safe level by enclosing the equipment or shielding the thyratron with at least 1.6 mm ( $\frac{1}{16}$  inch) thick steel panels.

Users and equipment manufacturers must check the radiation level under their maximum operating conditions.

## TRIGGER GRID CONNECTIONS


### Modulator Service with two trigger pulses and negative bias

Recommended for maximum cathode utilisation and therefore maximum life.

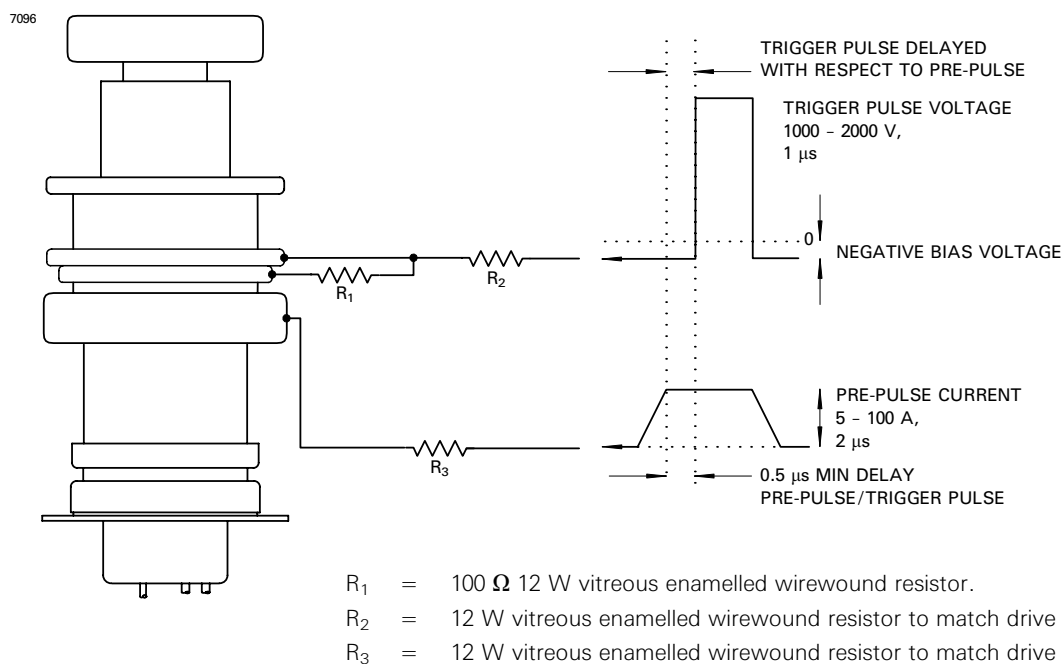


### Modulator Service with single trigger pulse

i) with zero bias on trigger pulse.

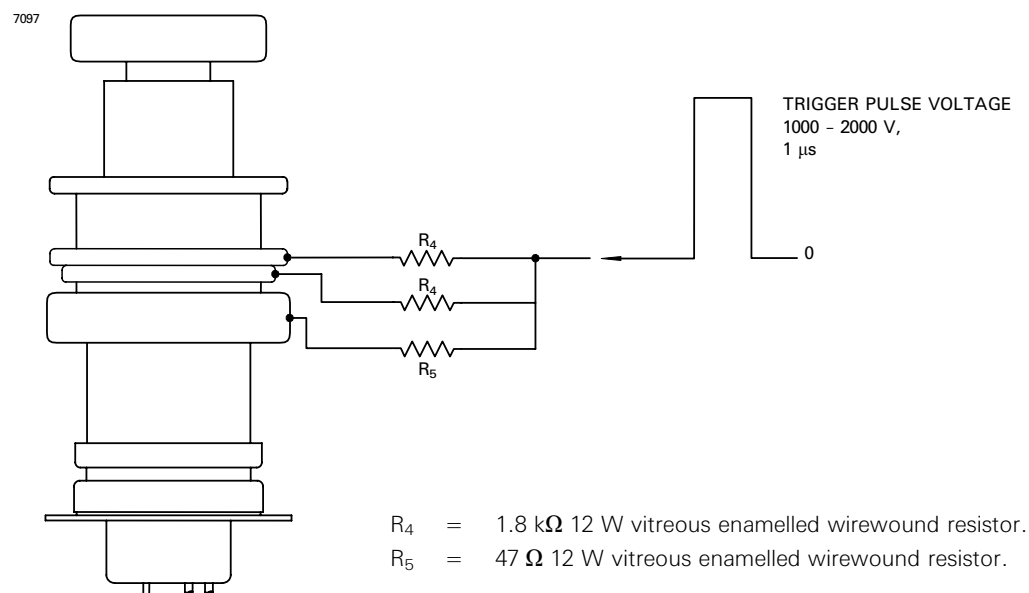


ii) with negative bias on trigger pulse.

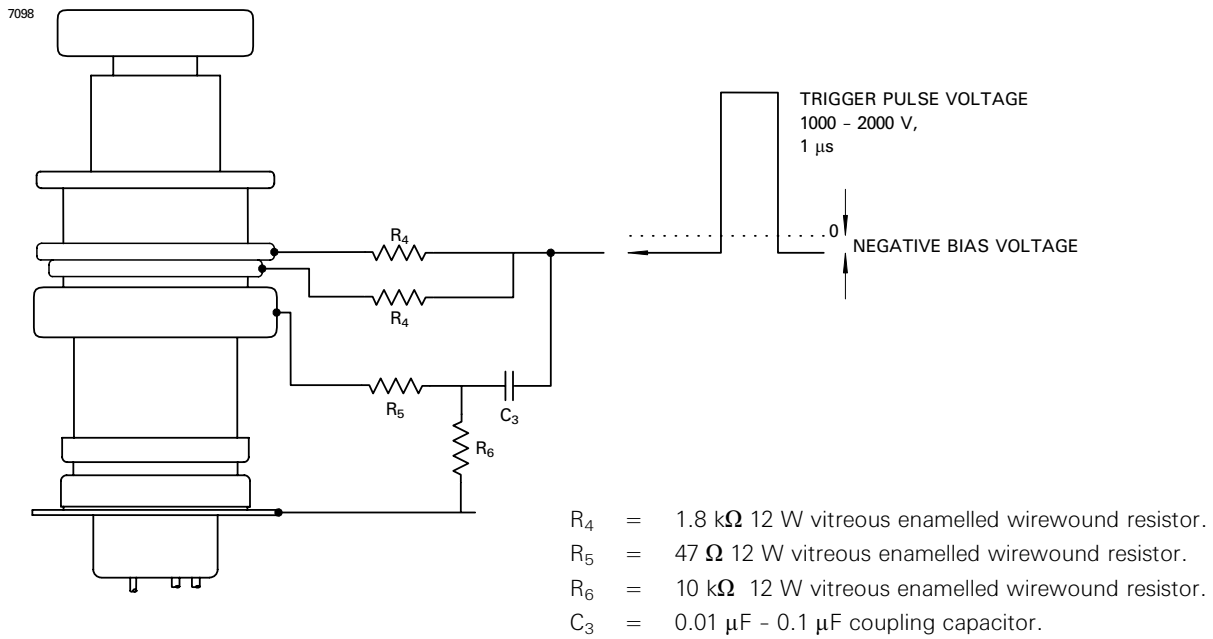


### Modulator Service with single pulse (with or without negative bias) and DC priming.

Suitable only for applications where the rate of rise of anode current is  $\lesssim 10$  kA/ $\mu$ s and anode voltage is below 40 kV.

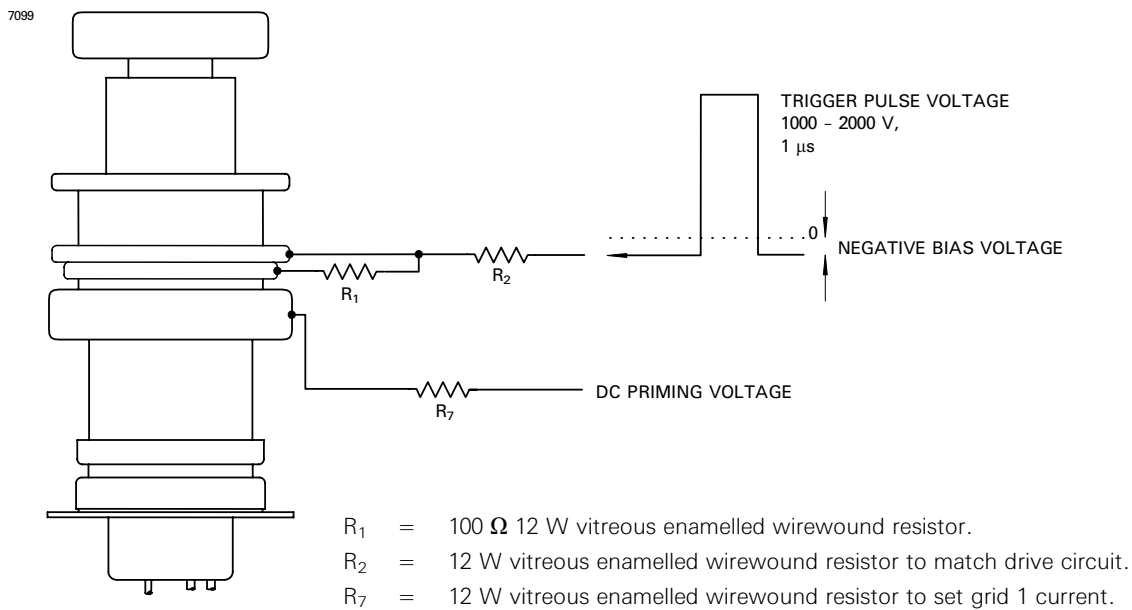


## Command Charge Service with Grid 3 as screen grid

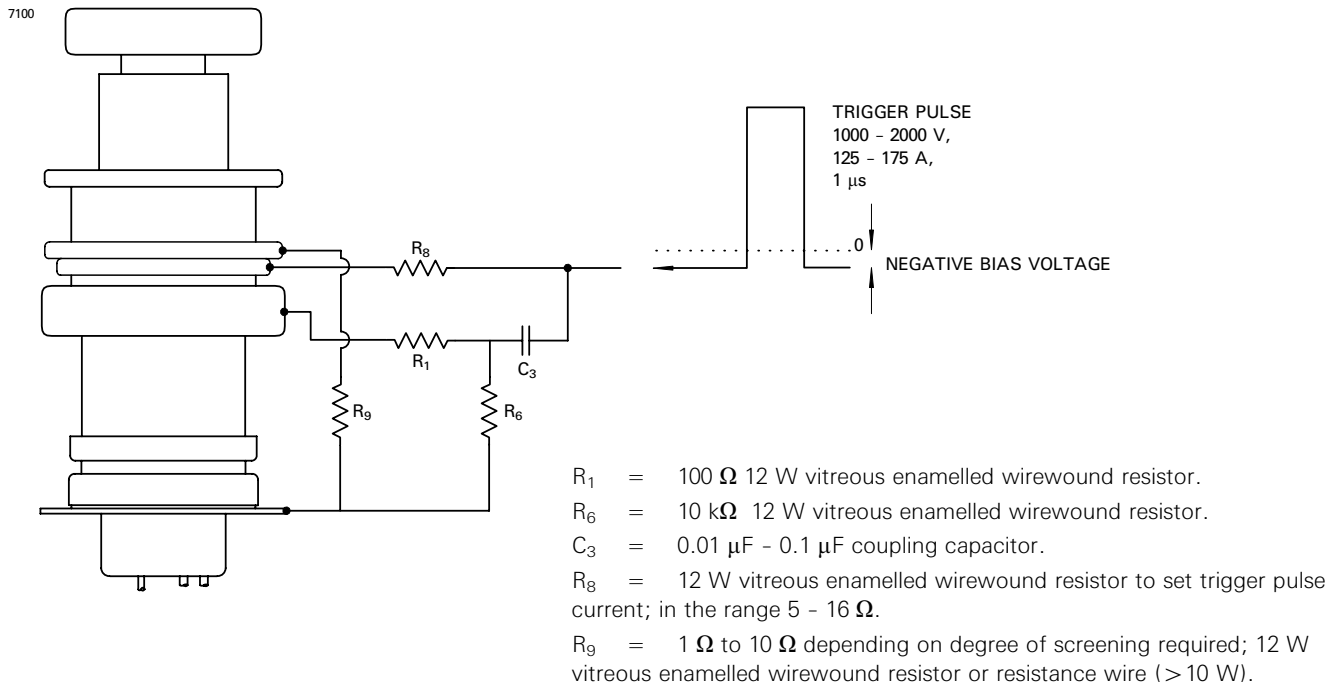

## SCHEMATIC

Gradient grid and heater connections


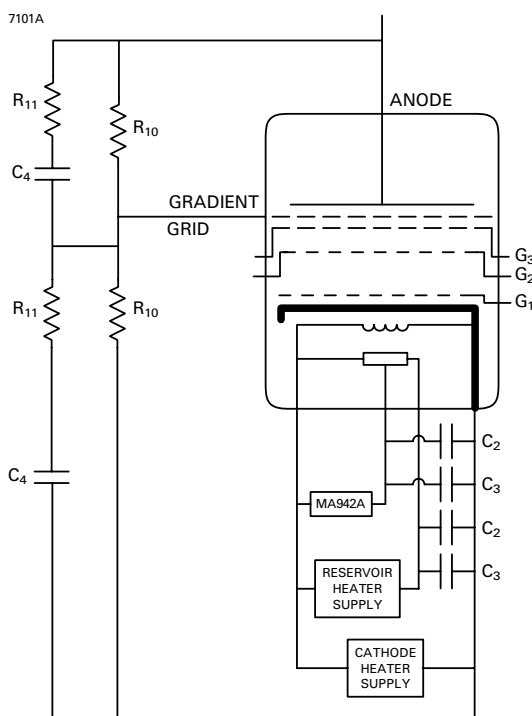


## Recommended Values

- $R_{10}$  = 10 to 25 M $\Omega$  high voltage resistors with a power rating consistent with the forward anode voltage.  
 $R_{11}$  = 470  $\Omega$  - 1 k $\Omega$  12 W vitreous enamelled wirewound resistors.  
 $C_4$  = 500 - 1,000 pF capacitors with a voltage rating equal to the peak forward voltage. These capacitors (and  $R_{11}$ ) may be needed to correctly divide the voltage across each gap when charging times are less than 5 ms approx.

CX1836 outline is identical, except that it has no gas pressure control lead (black).

6434B



Inch dimensions have been derived from millimetres.

1. This dimension also applies to the clamping screws and lugs.
2. The mounting flange is the connection for the cathode and cathode heater return.
3. These two leads must be connected to the same terminal of the heater transformer.
4. The end cover is at heater potential and must not be grounded.
5. The terminal screws are in line with the hole in the mounting flange to within  $\pm 6.35$  mm (0.250 inch).
6. The recommended mounting hole is 93.5 mm (3.861 inches) diameter.

MA942A RESISTOR BOX

'X' type thyratrons have an additional lead on the base which enables the user to adjust the gas pressure inside the tube to a greater degree than is possible by changing the reservoir voltage. This allows the gas pressure to be optimised for a particular set of operating conditions, reducing the power dissipation in the thyatron to a minimum and maximising its switching speed. The maximum gas pressure allowable is dependent on the voltage hold off required; the higher the gas pressure, the more likely the thyatron is to break down spontaneously. Optimisation is achieved by increasing the gas pressure until the thyatron will no longer reliably hold off the required anode voltage, and then reducing it again only until the tube will operate reliably without spontaneous anode voltage breakdowns.

The gas pressure of e2v technologies metal envelope thyratrons is normally set during manufacture to allow reliable operation at the maximum rated anode voltage, by resistors inside the base cap of the tube. In 'X' type tubes, these resistors are omitted and replaced by two parallel variable resistors mounted in the MA942A resistor box which is connected to the thyatron as shown in the schematic diagram. Increasing the value of this parallel combination will increase the pressure in the thyatron.

'X' type thyratrons are supplied with a recommended minimum combination of values. Do not use a lower combined value of resistors as this would result in the tube being operated with an unacceptably low gas pressure and may lead to tube damage and reduced tube life.

Ten resistor values can be selected by each rotary switch (3.3 Ω, 4.7 Ω, 6.8 Ω, 8.2 Ω, 10 Ω, 15 Ω, 18 Ω, 22 Ω, 33 Ω, O/C), giving the range of possible values shown in the table.



Paralleled Value (Ω)	Control Box Settings (Ω)		Paralleled Value (Ω)	Control Box Settings (Ω)	
1.65	3.3	3.3	5.19	6.8	22.0
1.94	3.3	4.7	5.30	8.2	15.0
2.22	3.3	6.8	5.63	8.2	18.0
2.35	4.7	4.7	5.64	6.8	33.0
2.35	3.3	8.2	5.97	8.2	22.0
2.48	3.3	10.0	6.00	10.0	15.0
2.70	3.3	15.0	6.43	10.0	18.0
2.78	4.7	6.8	6.57	8.2	33.0
2.79	3.3	18.0	see note	6.8	O/C
2.87	3.3	22.0	6.87	10.0	22.0
2.99	4.7	8.2	7.50	15.0	15.0
3.00	3.3	33.0	7.67	10.0	33.0
3.20	4.7	10.0	8.18	15.0	18.0
see note	3.3	O/C	see note	8.2	O/C
3.40	6.8	6.8	8.92	15.0	22.0
3.58	4.7	15.0	9.00	18.0	18.0
3.72	6.8	8.2	9.90	18.0	22.0
3.73	4.7	18.0	see note	10.0	O/C
3.87	4.7	22.0	10.31	15.0	33.0
4.05	6.8	10.0	11.0	22.0	22.0
4.10	8.2	8.2	11.65	18.0	33.0
4.11	4.7	33.0	13.2	22.0	33.0
4.51	8.2	10.0	15.0	15.0	O/C
4.68	6.8	15.0	16.5	33.0	33.0
see note	4.7	O/C	18.0	18.0	O/C
4.94	6.8	18.0	22.0	22.0	O/C
5.00	10.0	10.0	33.0	33.0	O/C
			O/C	O/C	O/C

**Note** Do not set parallel resistors to these values, as this may cause the power rating of the resistor to be exceeded.

OUTLINE  
(All dimensions without limits are nominal)

Ref	Millimetres	Inches
AA	125.0	4.921
AB	80.0	3.150
AC	57.0	2.244
AD	85.0 max	3.346 max

Inch dimensions have been derived from millimetres.

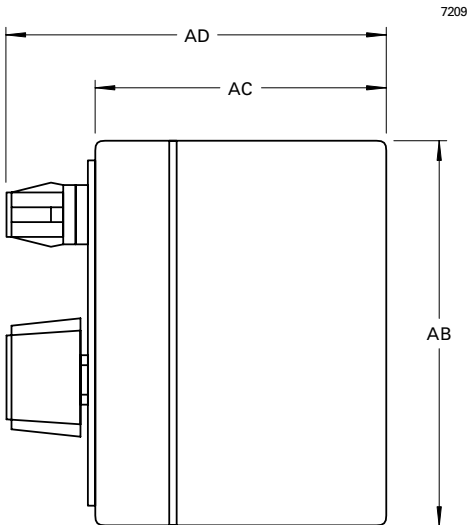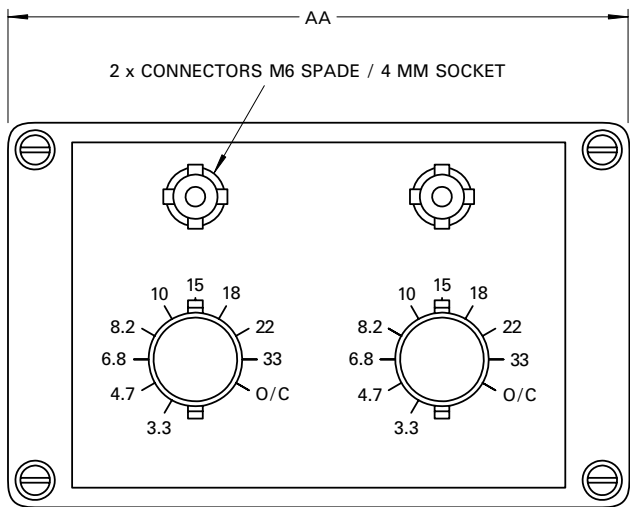

Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.